

DAE B1722

Plastic watertight NEMA 4 IP66 Universal Electrical Enclosure with mounting Plate, Lock Hole, Latch 6.9" x 8.66" x 3.94"

[Specification]

Model	B1722
Temperature Range	-40°C to 80°C (-40°F to 176°F)
Weight	1.6 lbs., about 25% of steel enclosure
Mounting	Surface Mount
Protection Degree	NEMA 4, NEMA 4X (Special Demand), IP 66
Material	PC (Polycarbonate) for both transparent lid and base
Shape	Square
Dimension (Outside)	(L*W*H): 6.69" x 8.66" x 4.33"/170 mm x 220 mm x 110 mm
Dimension (Inside)	(L*W*H): 6" x 8" x 4.14"/152 mm x 203 mm x 105 mm
Components	1 internal mounting plate with screws

[Feature]


- Water-tight Universal Electrical Enclosure with Polyurethane gasket.
- With UV resistance, the ultraviolet stabilizer has been added to both transparent lid and base.
- Readily to use with DAE sub-meters for outdoor use
- For both outdoor and Indoor use.



[Picture 1]



[Picture 2]

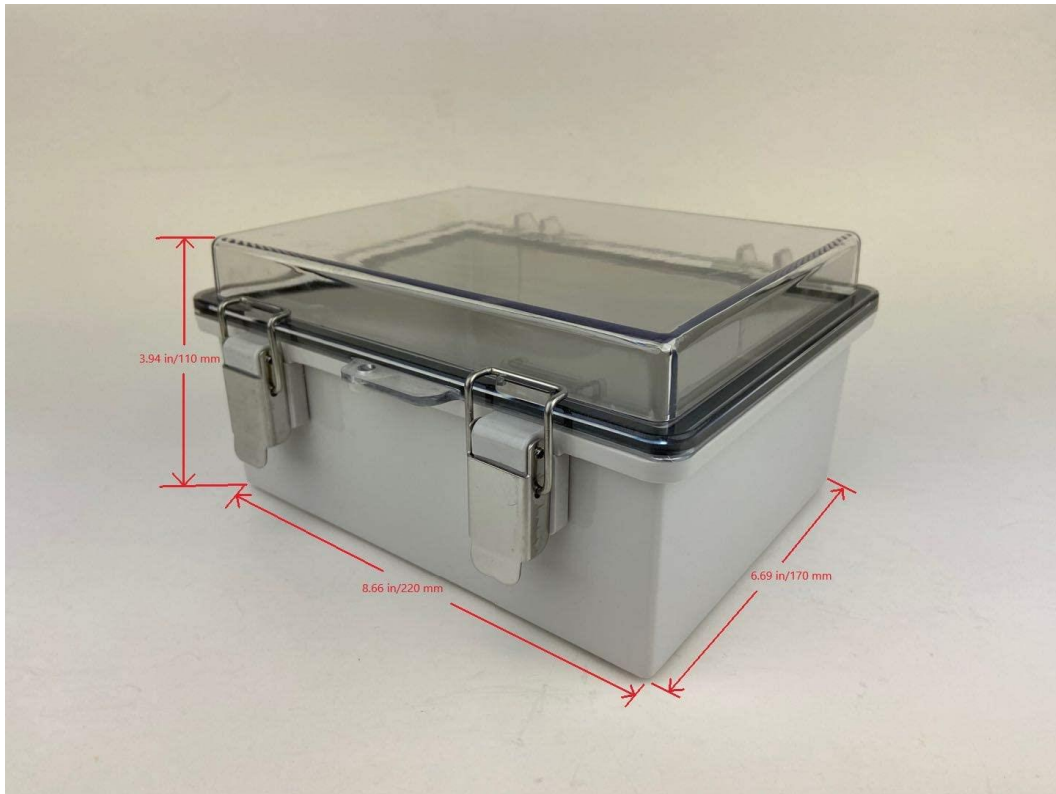

[Picture 3]




[Picture 4]



[Picture 5]



[Picture 6]

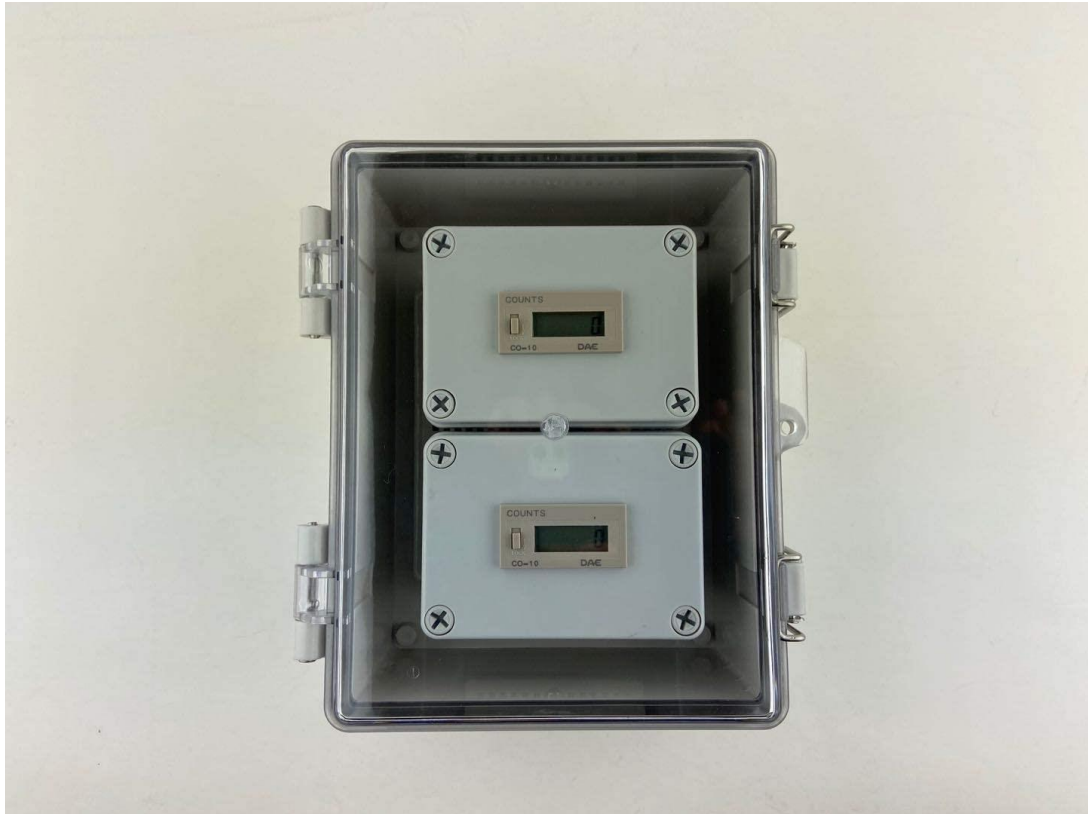

[Picture 7]