

## DAE B1725


**Plastic watertight NEMA 4 IP66 Universal Electrical Enclosure with Mounting Plate 6.9" x 9.84" x 3.94"**

### [Specification]


Model	B1725
Temperature Range	-40°C to 80°C (-40°F to 176°F)
Weight	1.6 lbs., about 25% of steel enclosure
Mounting	Surface Mount
Protection Degree	NEMA 4, NEMA 4X (Special Demand), IP 66
Material	PC (Polycarbonate) for both transparent lid and base
Shape	Square
Dimension (Outside)	(L*W*H): 6.9" x 9.84" x 3.94" / 175 mm x 250 mm x 100 mm
Dimension (Inside)	(L*W*H): 6.5" x 9.5" x 3.68" / 165 mm x 241 mm x 93 mm
Components	4 Plastic Screws, 1 internal mounting plate with screws

### [Feature]


- Water-tight Universal Electrical Enclosure with Polyurethane gasket.
- With UV resistance, the ultraviolet stabilizer has been added to both transparent lid and base.
- Readily to use with DAE sub-meters for outdoor use
- For both outdoor and Indoor use.

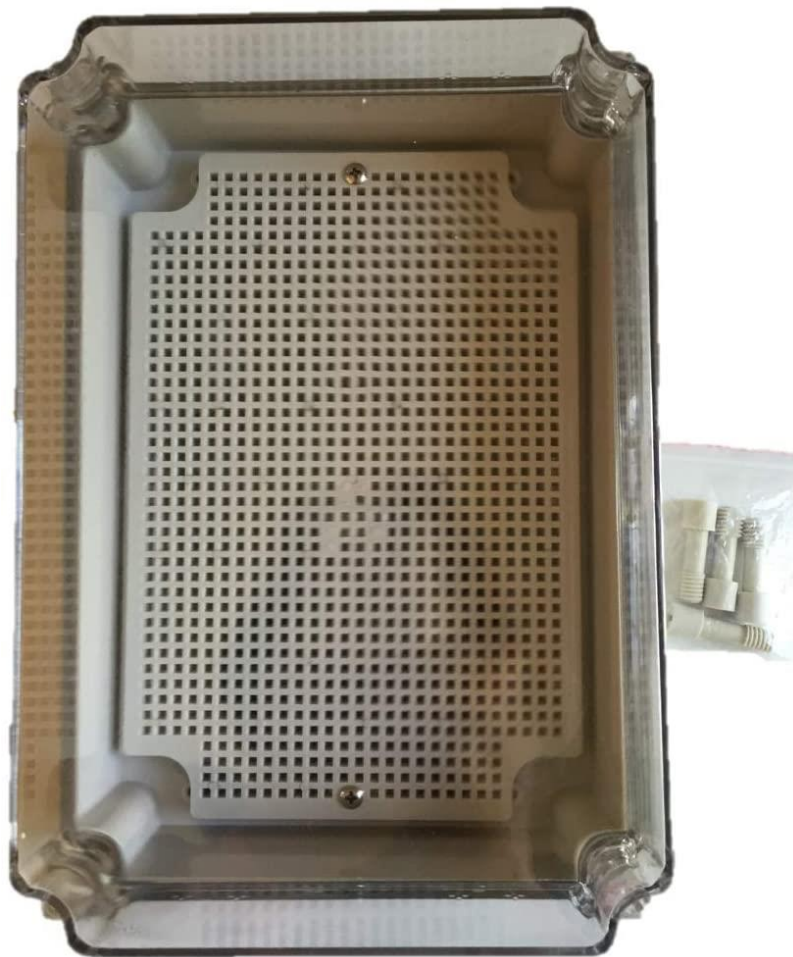

[Picture 1]

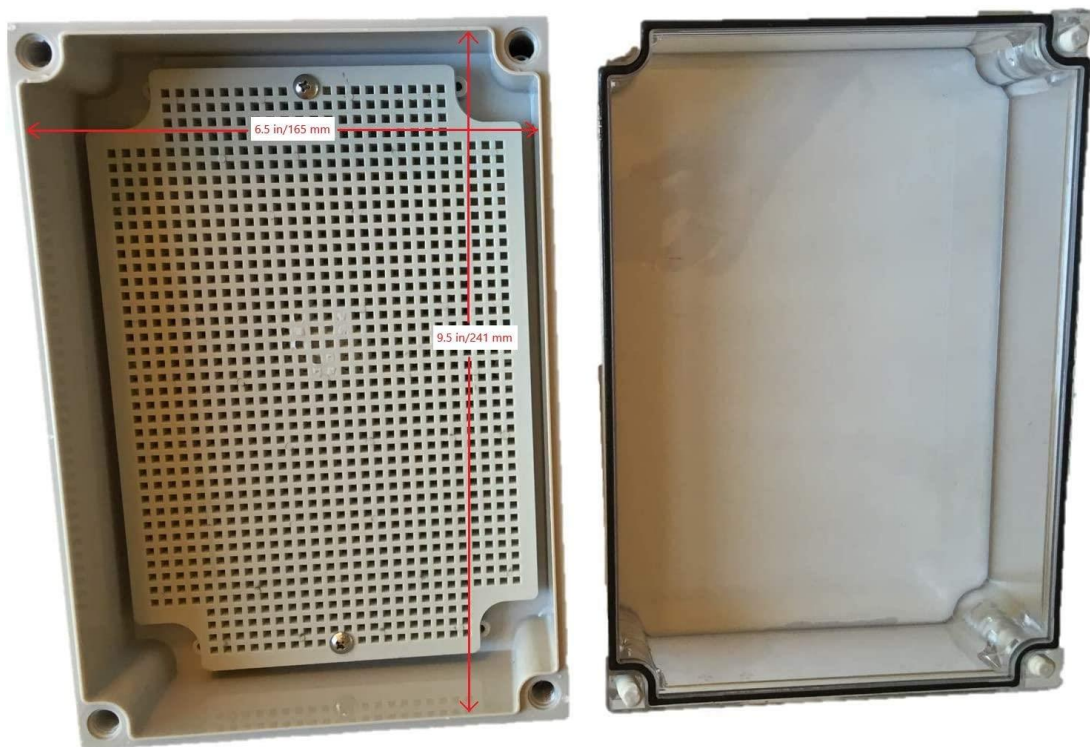

[Picture 2]

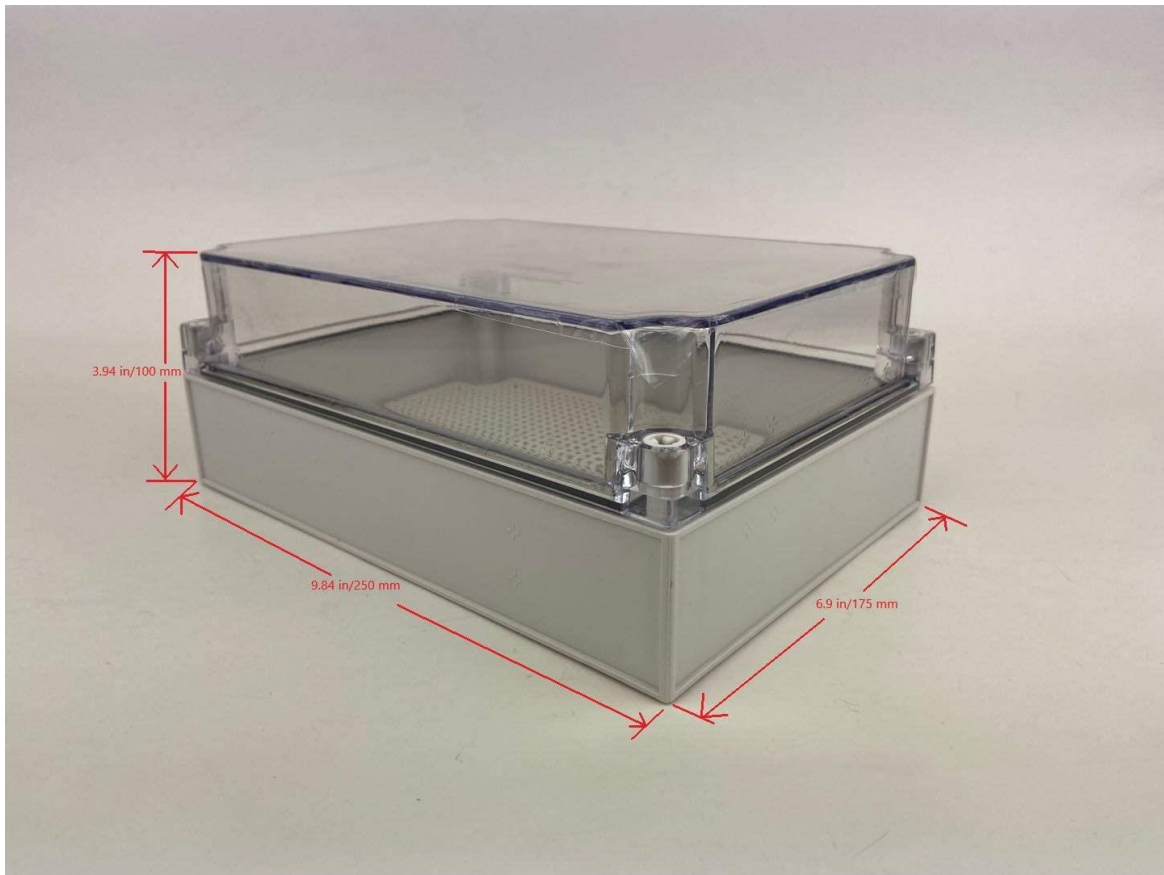

[Picture 3]



[Picture 4]



[Picture 5]



[Picture 6]