

## DAE B1725UL

**Plastic watertight NEMA 4 IP66 Universal Electrical Enclosure with Mounting Plate 6.9" x 9.84" x 3.94" UL Listed**

### [Specification]

Model	B1725UL
Temperature Range	-40°C to 80°C (-40°F to 176°F)
Weight	1.6 lbs., about 25% of steel enclosure
Mounting	Surface Mount
Protection Degree	NEMA 4, NEMA 4X (Special Demand), IP 66
Certification	UL listed
Material	PC (Polycarbonate) for both transparent lid and base
Shape	Square
Dimension (Outside)	(L*W*H): 6.9" x 9.84" x 3.94" / 175 mm x 250 mm x 100 mm
Dimension (Inside)	(L*W*H): 6.5" x 9.5" x 3.68" / 165 mm x 241 mm x 93 mm
Components	4 Plastic Screws, 1 internal mounting plate with screws

### [Feature]


- UL Listed Water-tight Universal Electrical Enclosure with Polyurethane gasket.
- With UV resistance, the ultraviolet stabilizer has been added to both transparent lid and base.
- Readily to use with DAE sub-meters for outdoor use
- For both outdoor and Indoor use.




[Picture 1]



[Picture 2]

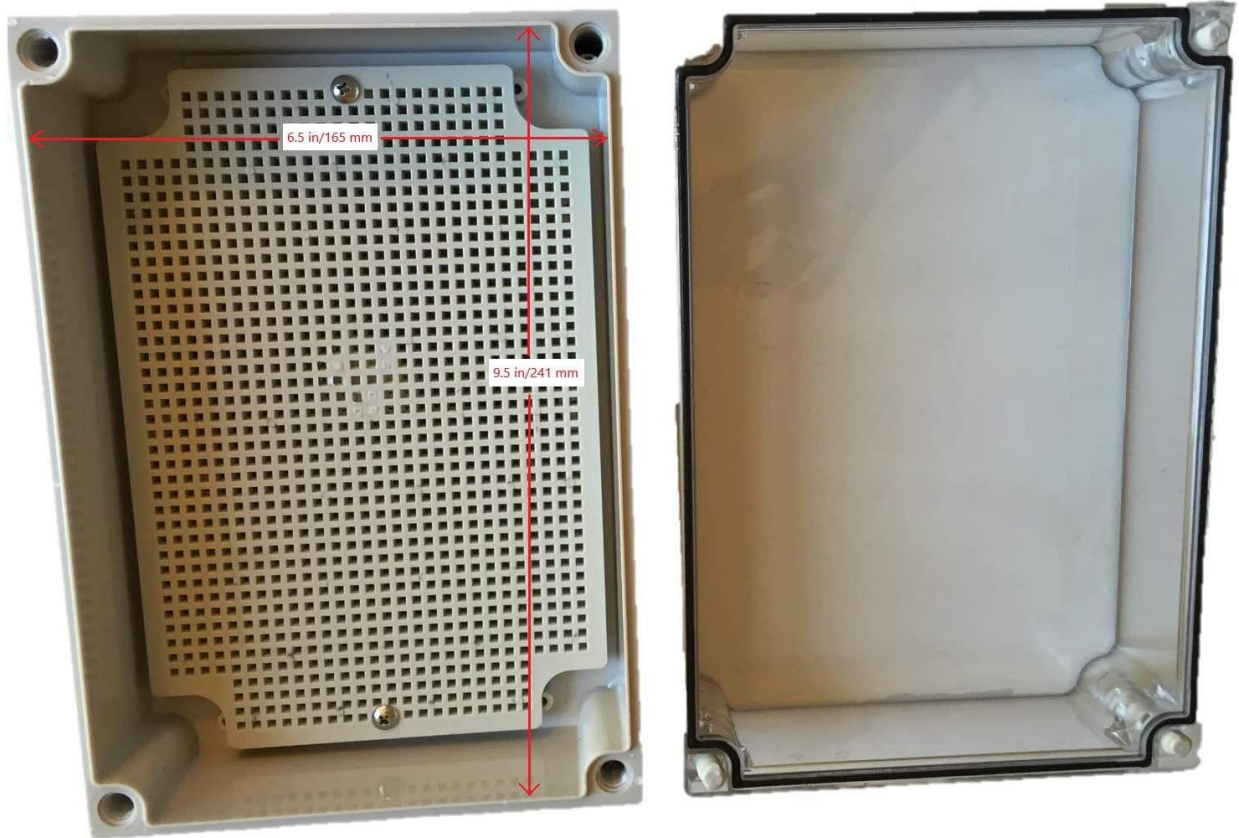

[Picture 3]

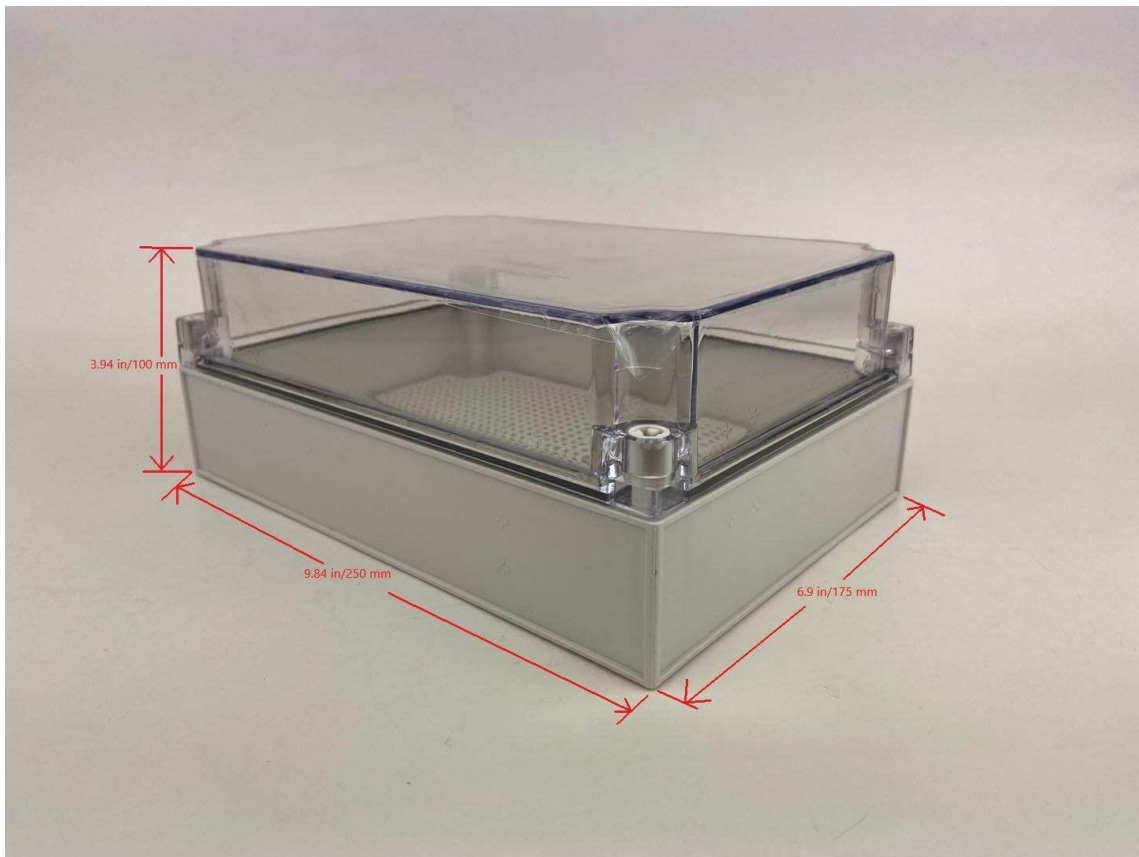

[Picture 4]





[Picture 5]



[Picture 6]